


NPS ≥ 1 1/2 in

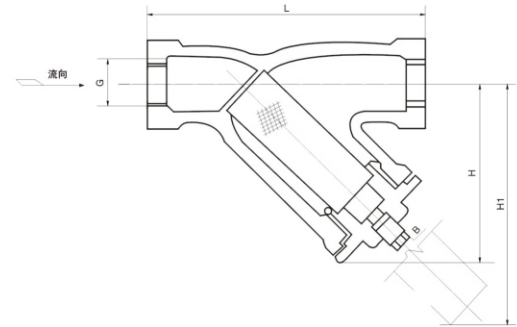

• 执行标准 Administer Standard

设计与制造 Design And Manufacture	结构长度 Face to face/ End to end	法兰尺寸 Flange Dimension	压力-温度 Pressure Temperature Rating	试验-检验 Inspection And Test
JIS B2071 B2081	JIS B2002	JIS B2212 B2214	JIS B2071 B2081	JIS B2003
ANSI B16.34	ANSI B16.34	ANSI 16.5	ANSI B16.34	API 598

• 压力试验 Pressure Test

公称压力 Nominal Pressure	强度试验 Shell Test		密封试验(液) Water Seal Test		密封试验(气) Air Seal Test	
	MPa	Lbf/in ²	MPa	Lbf/in ²	MPa	Lbf/in ²
150	3.0	430	2.2	315	0.4-0.7	60-100
300	7.7	1110	5.7	815		

• 主要零件材料及性能 Main Part Materials and Property

体盖瓣 摇杆 导向套 Body Cover Dischinge Slideway bush	滤网 Filter	垫片 Sealing Shim	工作温度℃ Working Temperature	适用介质 Suitable Medium	
WCB	SS316	增强柔性石墨 1Cr13/柔性石墨 不锈钢/耐酸石棉 PTFE 齿型垫片 Enhanced Flexible graphite 1Cr13/Flexible Graphite	≤425℃	水、蒸汽、油品 Water Steam Petroleum Propducts	
WC1			≤450℃		
WC6			≤540℃		
WC9			≤570℃		
C5 C12			≤540℃		
CF8			≤200℃		硝酸类、醋酸类 Nitric acid Acetic acid
CF8M					
CF3					
CF3M	SS316L	Tooth profile gasket			

• 规格 主要尺寸 Size Main Dimensions

DN		150LB(10K)							
mm	in	L	D	D1	D2	b	n-φd	H	H1
15	3/4	108	95	70	52	12	4-φ15	67	92
20	1/2	117	100	75	58	14	4-φ15	73	105
25	1	127	125	90	70	14	4-φ19	87	117
32	1 1/4	140	135	100	80	16	4-φ19	100	138
40	2 1/2	165	140	105	85	16	4-φ19	123	150
50	2	203	155	120	100	16	4-φ19	147	179
65	2 1/2	216	175	140	120	18	4-φ19	180	232
80	3	241	185	150	130	18	8-φ19	198	263
100	4	292	210	175	155	18	8-φ19	234	337
125	5	390	250	210	185	20	8-φ23	274	383
150	6	440	280	240	215	22	8-φ23	314	452
200	8	540	330	290	265	22	12-φ23	400	555
250	10	760	400	355	325	24	12-φ25	512	725
300	12	870	445	400	370	24	16-φ25	581	870
350	14	950	490	445	415	26	16-φ25	633	933
DN		300LB(20K)							
mm	in	L	D	D1	D2	b	n-φd	H	H1
15	3/4	152	95	70	52	12	4-φ15	70	95
20	1/2	178	100	75	58	14	4-φ15	80	110
25	1	203	125	90	70	14	4-φ19	92	120
32	1 1/4	216	135	100	80	16	4-φ19	105	142
40	2 1/2	229	140	105	85	16	4-φ19	128	155
50	2	267	155	120	100	16	4-φ19	152	184
65	2 1/2	292	175	140	120	18	4-φ19	185	236
80	3	318	185	150	130	18	8-φ19	204	366
100	4	356	210	175	155	18	8-φ19	240	340
125	5	460	250	210	185	20	8-φ23	280	386
150	6	550	280	240	215	22	8-φ23	320	456
200	8	600	330	290	265	22	12-φ23	410	560
250	10	760	400	355	325	24	12-φ25	530	730
300	12	870	445	400	370	24	16-φ25	600	875
350	14	950	490	445	415	26	16-φ25	650	938